


## POWER SUPPLY type SP2000:

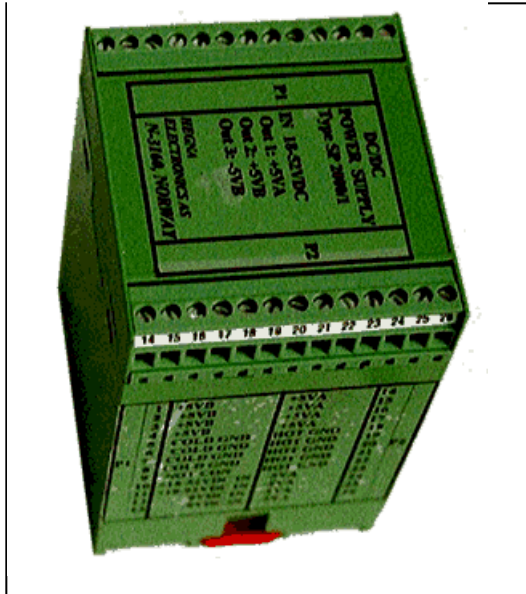

**SP2000 Power Supply** is designed with high isolation levels to prevent upstream-connected equipment from electrical transients. This protection will protect battery banks, chargers and other connected electronic equipment connected control supply source.

- Can supply power to 3 off. SF2100/1  
Power consumption with 3 off. SP2000/1 connected, < 5W.
- SP2000 are available in the following versions:  
18-52VDC, 110VDC.
- Output: +5VA – 5VA<sub>GND</sub>, +5VB - 5VB<sub>GND</sub> - -5VB
- Environment: -5 / +55°C Max. 90% none condensation.
- Protection: IP20
- Housing: D=75,W=65,H=105 mm
- Mounting: DIN rail.